


NYLON SASH BRAID

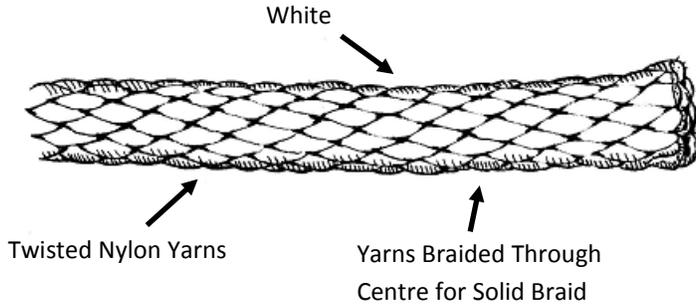

Features:

- ◆ High strength
- ◆ Resists rotation
- ◆ Can not be hockled
- ◆ Very flexible
- ◆ Smooth to handle
- ◆ Excellent abrasion resistance
- ◆ Excellent shock absorbing capacity
- ◆ Not spliceable
- ◆ Custom Coatings available
- ◆ Custom colours available

Construction:

- ◆ Smooth-surfaced, this is a uniformly round solid braid
- ◆ The rope strands cross and fill the centre, resulting in a truly solid product, thus eliminating the need for core fibres

Applications:

- ◆ Recommended uses for our general purpose Nylon Sash Braid included tie downs, block lines, descent lines and general utility

Product Code	Size Inches	Size mm	Tensile* Lbs	L.D Lbs/Kft
NYSA18W	1/8"	3.2	500	4.35
NYSA316W	3/16"	4.8	915	9.52
NYSA14W	1/4"	6.4	1475	14.08
NYSA516W	5/16"	7.9	2600	22.73
NYSA38W	3/8"	9.5	3600	35.71
NYSA12W	1/2"	12.7	6200	55.56

* Average Tensile Strengths, consult **MCM Ropes** if safety becomes an issue *



Professional Engineers
Ontario



MCM ROPES & RIGGING LTD.



www.mcmropes.com